
Engine HR

Biologicals

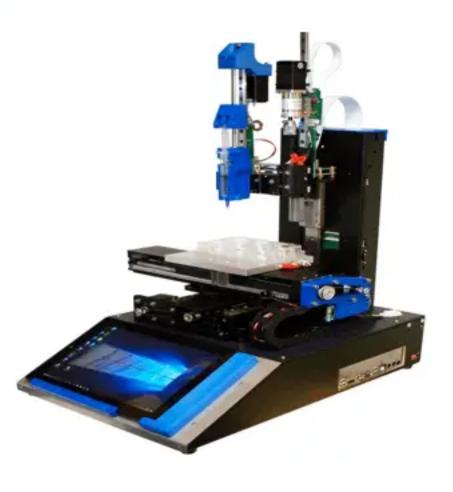

The High Resolution
Platform for Biologicals
and Micro-scaffolding
and ideal for microfluids and bio-plotting.
Configured for Well
plates and UV Photoinitiation.

Specifications

- Motion Control: 0.9° Stepping Motor now with Closed-Loop Feedback
- Positional Resolution X/Y/Z in μm: 1.25 / 1.25 / 1
- Positional Accuracy X/Y/Z in μm: 12 / 12 / 10
- Integrated Windows Tablet PC Multi-touch Screen
- Integrated Dual CAN-bus architecture
- Exterior Dimension: 33x51x49 cm

- Bed Temperatures: 120°C
- Chamber Heater: No Chamber
- Power: 750W
- Voltage: 110-120 VAC/220-240
 VAC
- Frequency: 50/60Hz
- Build Volume: 100x100x100 mm